


## (3&4 Conductor) SIHF WIRE 600V, 355°F(180°C), Tin-Plated Copper



### FEATURES

- CONDUCTOR - Tin-Plated Copper Stranded
- INSULATION - Extruded Silicone Rubber
- JACKET - Extruded Silicone Rubber
- COATING - None
- STANDARDS - \*\*\*\*\*TBA\*\*\*\*\*

### DESCRIPTION

- Tough and Flexible high temperature wire that can withstand repeated flexing and mechanical abuse.
- Moisture resistant + Fray resistant + Asbestos Free

### STOCK - SEW-2 600V, 390°F/200°C

PART#	# COND	AWG	STRANDS	OD (nom.) (inch/mm)	AMPACITY*
SIHF-16/3	3	16 AWG	**TBA**	**TBA**	33
SIHF-16/4	4	16 AWG	**TBA**	**TBA**	28
SIHF-14/3	3	14 AWG	**TBA**	**TBA**	48
SIHF-14/4	4	14 AWG	**TBA**	**TBA**	43
SIHF-12/3	3	12 AWG	**TBA**	**TBA**	61
SIHF-12/4	4	12 AWG	**TBA**	**TBA**	54
SIHF-10/3	3	10 AWG	**TBA**	**TBA**	80
SIHF-10/4	4	10 AWG	**TBA**	**TBA**	72


#### \* Ampacity Assumptions

Conductor Temp - 150°C  
Ambien Air Temp - 40°C  
ambient air

#### Correction Factor - Temp

Ambient 212°F(100°C) - 79%  
Ambient 301°F(150°C) - 50%  
Ambient 355°F(180°C) - 35%

## (3&4 Conductor) TGGT WIRE 600V, 482°F(250°C), Nickel-Plated Copper

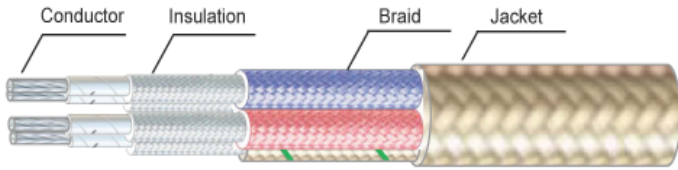

### Conductor Colors

- 3 Conductor - Black, Red, Beige+Green Stripe
- 4 Conductor - Black, Red, Blue, Tan+Green Stripe

### FEATURES

- CONDUCTOR - 3% Nickel-Plated Copper Stranded
- INSULATION - PTFE Tape, Fiberglass Wrapped
- JACKET - Fiberglass Braid
- COATING - High Temperature Finish
- STANDARDS - UL5256, CSA#270403

### DESCRIPTION

- Tough and Flexible high temperature wire that can withstand repeated flexing and mechanical abuse.
- Moisture resistant + Fray resistant + Asbestos Free

### STOCK - TGGT 600V, 482°F/250°C

PART#	# COND	AWG	STRANDS	OD (nom.) (inch/mm)	AMPACITY*
TGGT-16/3-FM	3	16 AWG	26 x 0.010"	0.252"(6.4mm)	28
TGGT-16/4-FM	4	16 AWG	26 x 0.010"	0.284"(7.2mm)	22
TGGT-14/3-FM	3	14 AWG	41 x 0.010"	0.280"(7.1mm)	35
TGGT-14/4-FM	4	14 AWG	41 x 0.010"	0.311"(7.9mm)	31
TGGT-12/3-FM	3	12 AWG	65 x 0.010"	0.323"(8.2mm)	48
TGGT-12/4-FM	4	12 AWG	65 x 0.010"	0.358"(9.1mm)	43
TGGT-10/3-FM	3	10 AWG	103 x 0.010"	0.413"(10.5mm)	65
TGGT-10/4-FM	4	10 AWG	103 x 0.010"	0.461"(11.7mm)	58
TGGT-8/3-FM	3	8 AWG	163 x 0.010"	0.480"(12.2mm)	84
TGGT-8/4-FM	4	8 AWG	163 x 0.010"	0.539"(13.7mm)	74


### \* Ampacity Assumptions

Conductor Temp - 250°C  
Ambien Air Temp - 25°C

### Correction Factor - Temp

Ambient 212°F(100°C) - 85%  
Ambient 301°F(150°C) - 65%  
Ambient 391°F(200°C) - 49%  
Ambient 436°F(225°C) - 35%

## (3&4 Conductor) MGT WIRE 600V, 842°F(450°C), Nickel-Clad Copper

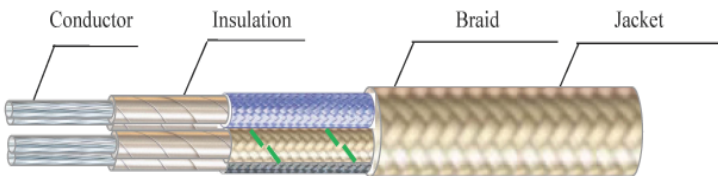

### Conductor Colors

- 3 Conductor - Black, Red, Beige+Green Stripe
- 4 Conductor - Black, Red, Blue, Tan+Green Stripe

### FEATURES

- CONDUCTOR - 27% Nickel-Clad Copper Stranded
- INSULATION - Mica Tape
- JACKET - Fiberglass Braid
- COATING - High Temperature Finish
- STANDARDS - UL5335, CSA#270403

### DESCRIPTION

- Tough and Flexible high temperature wire that can withstand repeated flexing and mechanical abuse.
- Moisture resistant + Fray resistant + Asbestos Free

### STOCK - MGT 600V, 842°F/450°C

PART#	# COND	AWG	STRANDS	OD (nom.)	AMPACITY*
MGT-16/3-FM	3	16 AWG	26 x 0.010"	0.252"(6.9mm)	43
MGT-16/4-FM	4	16 AWG	26 x 0.010"	0.284"(7.9mm)	38
MGT-14/3-FM	3	14 AWG	41 x 0.010"	0.280"(7.7mm)	58
MGT-14/4-FM	4	14 AWG	41 x 0.010"	0.311"(8.6mm)	51
MGT-12/3-FM	3	12 AWG	65 x 0.010"	0.323"(8.8mm)	76
MGT-12/4-FM	4	12 AWG	65 x 0.010"	0.358"(9.8mm)	68
MGT-10/3-FM	3	10 AWG	103 x 0.010"	0.413"(11.6mm)	101
MGT-10/4-FM	4	10 AWG	103 x 0.010"	0.461"(13.0mm)	90
MGT-8/4-FM	4	8 AWG	163 x 0.010"	0.480"(15.1mm)	101

### \* Ampacity Assumptions

Conductor Temp - 250°C  
Ambien Air Temp - 25°C

### Correction Factor - Temp

Ambient 212°F(100°C) - 122%  
Ambient 391°F(200°C) - 100%  
Ambient 481°F(250°C) - 87%  
Ambient 571°F(300°C) - 70%  
Ambient 661°F(350°C) - 49%